VIRTUO®

VIRTUO AG-VT-18 (2CH/4CH) SWING AUTO GATE

Generation of electro-mechanical high-quality for residential gates

TECHNICAL INFORMATION

Model	AG-VT-18
Power Supply	AC110/ 200V, 60Hz/50Hz
Motor Power Supply	12 - 24V
Operating Voltage	DC 24V for Normal Speed DC 12V for Cushioning Speed
Max. Gate Length	3 meter per wing
Max. gate Weight	250kg per wing with force adjustable
Safety Clutch	Electronic Current Sensing
Electronic Controller	Micro-processor Based
Position Limit Device	Electronic Fuzzy Logic
Backup Battery	12V 7AH Rechargeable
Travel Time	10 - 15 seconds
Working Temperature	0'C - 80'C
Weight	4kg

4CH CONTROL PANEL & ACCESSORIES

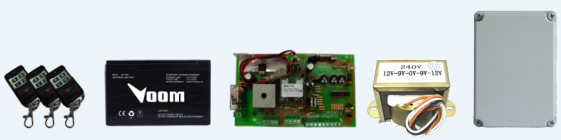

2CH CONTROL PANEL & ACCESSORIES

Overall Installation Guide

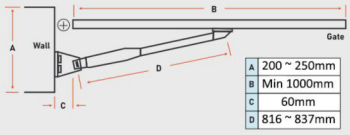

Installation Outlook



Measurement

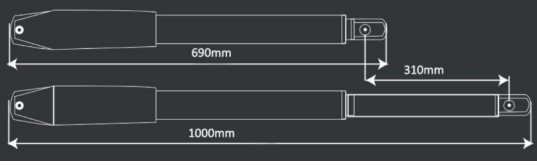

24V DC HEAVY DUTY
Electro-Mechanical Automated System
ITALIAN TECHNOLOGY

ITALIAN TECHNOLOGY